




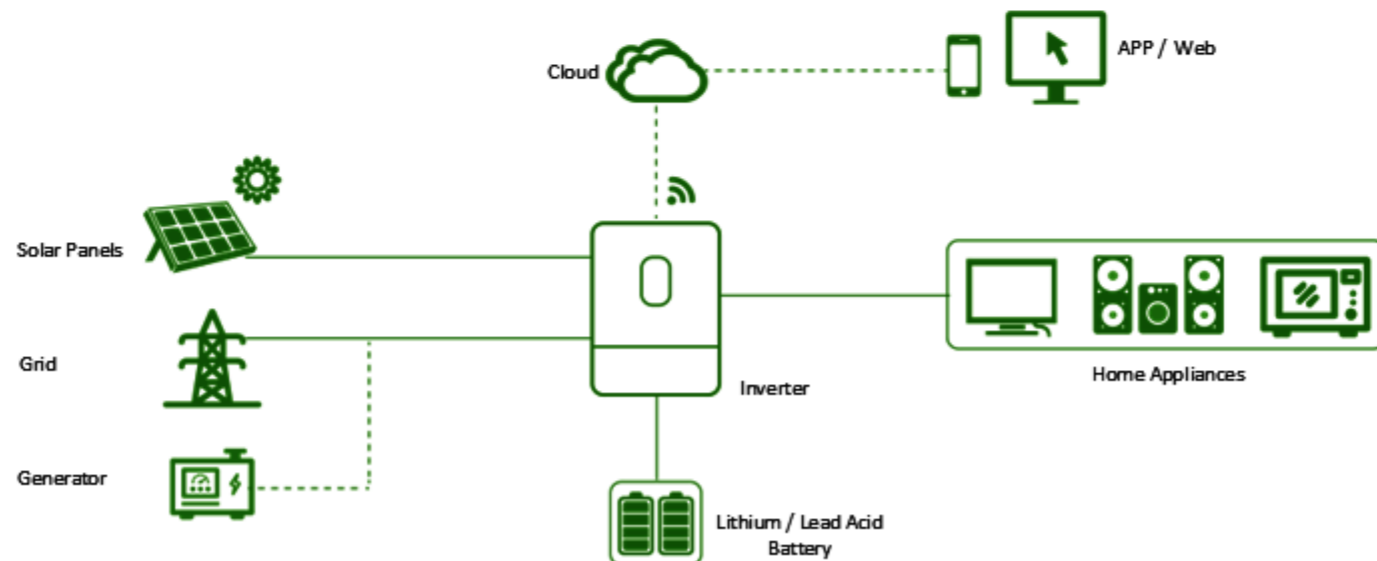


# GGIV 6000

## Single Phase Hybrid Inverter



-  Feed in Grid
-  Pure Sine Wave
-  Detachable Dust Cover
-  Lithium Battery Activation
-  Workable with Generator
-  Wide MPPT Range 120-500V
-  WiFi Monitoring
- BMS** Support Lithium/Lead-acid Battery



Model	GGIV 6000
<b>AC Input</b>	
Rated Input Voltage (VAC)	208 /220 /230 /240; L + N + PE
Voltage Range (VAC)	90~280±3 (normal mode); 170~280±3 (UPS mode)
Frequency (Hz)	50 /60 (Auto Adaptive)
<b>AC Output</b>	
Rated Capacity (kW)	6.0
Surge Power (kVA)	10
Voltage (VAC)	208 /220 /230 /240
Power Factor (PF)	1
Frequency	50/60Hz±0.1%
Switch Time (ms)	10 (normal mode) / 10 (UPS mode)
Wave Form	Pure Sine Wave
Overload Capacity (Battery Mode)	60s@ 102%~110% load; 10s@ 110%~130% load; 3s@ 130%~150% load; 0.2s@>150% load
Max. Efficiency (BatteryMode)	93%@48VDC
Parallel Quantity	9
<b>Charger (PV / AC)</b>	
Solar Charger Type	MPPT
Max PV Input Current /Input Power	18A /6000W
MPPT Range@Operating Voltage (VDC)	120~450
Max PV Open Circuit Voltage (VDC)	500
Max PV Charge Current (A)	80
Max AC Charge Current (A)	80
Max. Charge Current (PV + AC) (A)	80
<b>Battery</b>	
Rated Voltage (VDC)	48
Floating Charge Voltage (VDC)	54
Overcharge Protection (VDC)	61
Battery Type	Lithium and Lead-acid
<b>Interface</b>	
HMI	LCD
Interface	RS485 /RS232 /USB /Dry Contact
Monitoring	WiFi (Optional)
<b>General Data</b>	
Ingress Protection	IP21
Operating Temperature	-10 °C ~ 50 °C
Relative Humidity	5% ~ 95% (Non-condensing)
Storage Temperature	-15 °C ~ 60 °C
Net Weight (kg)	9.5
Dimensions (W*H*D)	510*306*115mm (without bracket)
Max. Operating Altitude	4000m (Derating above 1000m)